



# DEEP CYCLE AGM TECHNOLOGY

DEEP CYCLE AGM BATTERY

## LDC12-200-4D BCIGROUP 4D

### FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



### ELECTRICAL SPECIFICATIONS

Voltage(V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	215	200	190	172	160	445	/	115

### PHYSICAL SPECIFICATIONS

Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
LDC12-200-4D	527 (20.75)	214 (8.43)	220 (8.74)	244 (9.61)	56.1 (123.7)	DT-3/8	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C ~ 50°C (5°F ~ 122°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (5°F ~ 104°F)



TS16949


ISO14001

ISO9001

OHSAS18001

# LDC12-200-4D


## DIMENSIONS

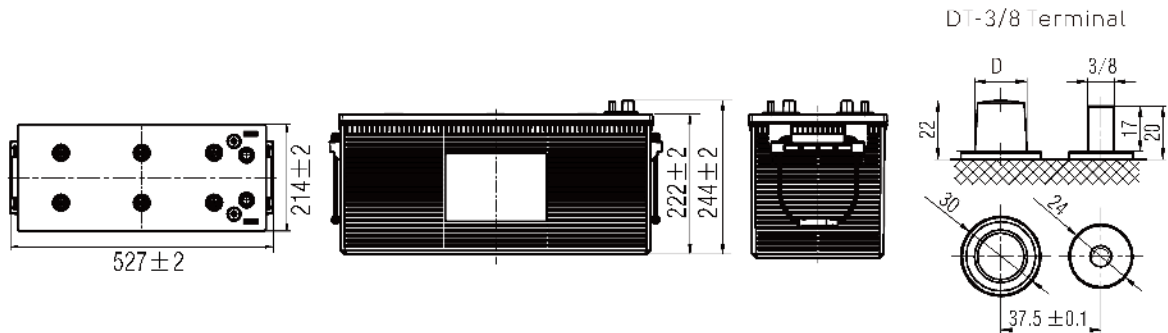


Note: D:Positive 19.5<sup>0</sup><sub>0.3</sub>, D:Negative 17.9<sup>0</sup><sub>0.3</sub>; Terminal Torque Values in -lb(Nm) : 176 - 203(20 - 23)

## PERFORMANCE CHARACTERISTICS


### LEOCH LDC AGM Charging Profile

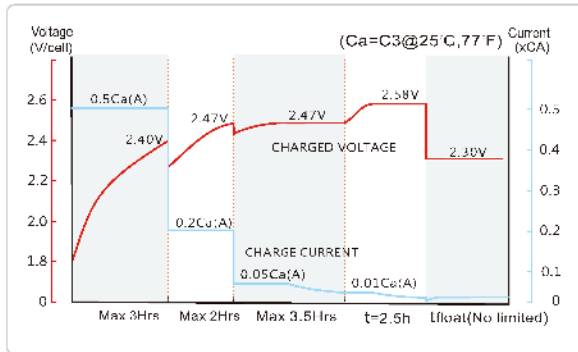


### Relationship of OCV and State Of Charge (25°C, 77°F)

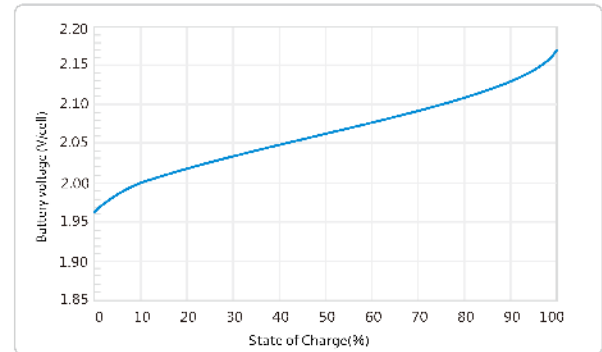

### Cycle Life In relation to Depth Of Discharge

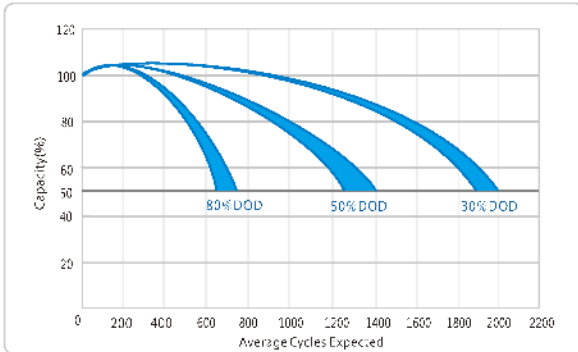

### Self-discharge Characteristic

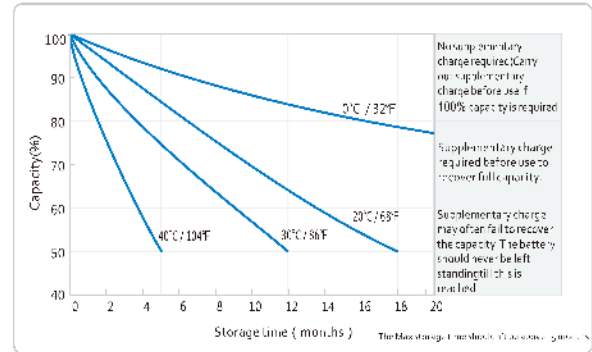

● LEOCH BATTERY CORP. USA:  
19751 Descartes, Foothill Ranch, CA 92610 USA  
Tel: 949-588-5853 E-mail: sales@leoch.us



DEEP CYCLE AGM BATTERY